

# 无刷直流减速电机

BRUSHLESS DC REDUCTION MOTOR

## 60 系列无刷直流电机


60 Series Brushless DC Motor

15W 25W 30W 40W 60W 80W


□ 60mm



### 电机外形图 Motor Dimensions

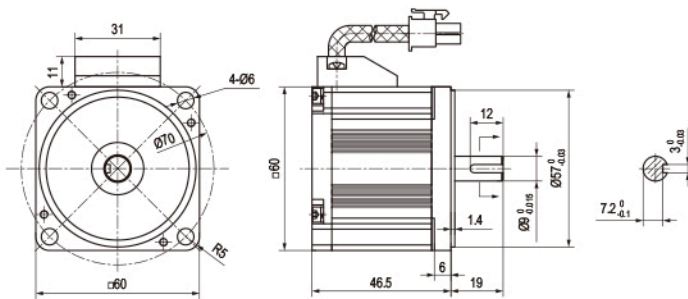

### 无刷直流电机接线 Brushless DC Motor Wiring



#### 端子及接线说明 Terminal and wiring instructions

1	2	3	4	5	6	7	8
U	V	W	GND	Hv	Hw	Hu	Vcc
黄 (粗) Yellow (Trick)	白 (粗) White (Trick)	蓝 (粗) Blue (Trick)	黑 (细) Black (Fine)	白 (细) White (Fine)	蓝 (细) Blue (Fine)	黄 (细) Yellow (Fine)	红 (细) Red (Fine)

### 电机性能参数 Motor Performance Parameters

型号 Model	额定功率 Rated Power	电压 Voltage	额定电流 Rated Current	额定转速 Rated Speed	额定力矩 Rated Torque	长度 Length
	W	V	A	RPM	N.m	mm
G2BLD	15	DC12	2.2	1800	0.08	46.5
		DC12	3.4	1800	0.13	
	25	DC24	1.9	1800	0.13	
		DC48	1.0	1800	0.13	
	30	DC24	2.0	2500	0.11	
		DC48	1.05	2500	0.11	
	40	DC24	2.7	1800	0.21	
		DC48	1.4	3000	0.13	
	60	DC24	3.38	1800	0.32	61.5
		DC48	1.92	1800	0.32	
	80	DC24	5.1	3000	0.25	
		DC48	2.55	3000	0.25	